



eptarefrigeration

PLUG-IN POWER



PLUG-IN POWER



IARP: PLUG-IN POWER AND SWITCH ON YOUR BUSINESS

Since 1983, IARP has established itself in the world of commercial refrigeration for the **Food&Beverage, Retail and Ho.re.ca**, through its high level of **specialization in the production of incorporated plug-in cabinets**.

The brand joined the **Epta Group in March 2013** to complete the Group's offer with a **range of products** already renowned in the **universe of plug-in refrigeration**.

The term **Plug-in power** denotes not only the type of product but also communicates the philosophy and distinctive traits of the IARP offer with its high standing in terms of **reliability, quality and innovative capacity**.

So Plug-in-Power expresses all of the features, performances and power of aesthetic attraction that enable these refrigerated cabinets to **"turn on"** and **maximise the interest of consumers** towards the products on display and the brands behind them.

EVOLVED, FLEXIBLE AND RELIABLE IDEAS

With an **exclusive style** which works well with **product personalization**, IARP produces customer specific designs that satisfy the need for **versatility and flexibility** in displaying products in a variety of commercial spaces, in order to actively involve consumers and **encourage the decision to purchase**. From this perspective the IARP brand is able to offer **evolved ideas that reflect market trends**.

Products produced to the customer's design have **graphics created by an in-house Team** of professionals and printers, fully reflecting the brand image of the company or the specific products on display.

It is also thanks to **its reliability** that the IARP brand is recognised as a global leader in the conservation and display of industrial **ice-cream**.

CUSTOMER SATISFACTION INCREASES AS THE QUALITY OF THE PRODUCT GROWS

Plug-in Power reflects the **high qualitative standards adopted by the IARP brand** which are a key driver of its success.

Every step of production is overseen by experienced staff and subjected to the most stringent quality tests, as demonstrated by the **ISO 9001 and 14001 certifications**.

EFFICIENCY AND SUSTAINABILITY: AN IMPORTANT DEVELOPMENT DRIVER

At the heart of IARP's competitiveness is the ability to constantly improve **the performance of its products** by **optimizing energy consumption, in full respect of environmental resources**.

IARP always aims at continually **updating its knowledge and improving its technology**. For this reason it chooses new generation refrigerating gases with a low environmental impact, eco compatible materials, colours, chemical products and raw materials, all of which are selected **in accordance with the REACH regulation**.

EPTA SERVICE: PRESENCE AND COMPETENCE

The high standing of IARP counts on **EptaService offer**. The strength of this offer is **the maintenance and management of spare parts**.

EptaService is a truly complete offer: from the cleaning to the replacement of parts with specific spares to the full refurbishment for the domestic market of display units, ensuring both the best performance during the life cycle of the cabinet and the truly exclusive possibility to renew and make the plug-in even more attractive for a new season of business.



COUNTER TOP FREEZER

- Excite .6
- Super Excite .7

MULTIDECK FREEZER

- Glee 43, 45, 55 .10
- Glee 35, 35 Max .11
- Asia 65CL, 115CL .12
- Glad 2D, 3D .13

MULTIDECK CHILLER

- Glee 42 .16
- Sun 42 .17
- Magenta - Scarlet .18
- Offlip 93, 125, 187 .19
- Offlip ECO 125, 187 .20
- Curl 70, 93, 125 .21

COMBINATION FREEZER & CHILLER

- Diana 125AN, 125ANP, 180AN, 180ANP .24
- Amaze S 100, S 130 .25
- Amaze 130, 180, 210, .26

CHEST FREEZER

- Delta 732, 735, 755 .28
- Delta 732 Eutectic .29
- Diana 125R, 180R .30
- Stella 150, 200, 250 .31
- Passion 130, 180, 210 .32
- Gelid .33

ISLAND FREEZER & CHILLER

- Krea 190, 210, 250 .36
- Krea 220 PBL, 250 PBL .37
- Glide 210, 250 .38
- Svaba 150 Lids, 200 Lids .39
- Svaba 150, 200 .40

SCOOPING FREEZER

- Delight 7 Lite .42

ITALIAN RANGE

- Delight 69-10-13 .46
- Delight 16-18-20 .47

* List of selected products for IARP World range





Customize me!
High quality printing
on metal sheets

EXCITE

Product categories:
Technical features:
Energy
Emission
Noise
Safety

Some Exits

Technical features:
Energy
Emission
Noise
Safety

COUNTER TOP FREEZER





EXCITE

COUNTER TOP FREEZER IARP *PLUG-IN SOLUTIONS*



	STD	OPT
2 adjustable feet	•	
Lock system		•

TECHNICAL SPECIFICATIONS	EXCITE
--------------------------	--------

Temperature	-25°C / -18°C
Cabinet Dimensions WxDxH (mm)	356 x 463 x 658
Gross - Net Volume (Lt)	23 - 20
Cooling System	Static
Defrosting System	Manual
Climatic Class	4/L1
Refrigerant Gas	R134a, R600
Internal Light	LED
Gross - Net Weight (Kg)	20 - 20
Packaging Dimensions (mm)	400 x 500 x 685 on pallet: 912 x 1100 x 2259 (12 units)
Q. ty	
Container 20" (ft)	144
Container 40" (ft)	312
Container 40" (ft) HC	312



SUPER EXCITE



	STD	OPT
2 adjustable feet	•	
Lock system	•	
Customized graphic		•
Digital thermometer	•	

TECHNICAL SPECIFICATIONS

SUPER EXCITE

Temperature	-25°C / -18°C
Cabinet Dimensions WxDxH (mm)	530 x 465 x 941
Gross - Net Volume (Lt)	73 - 62
Cooling System	Static
Defrosting System	Manual
Climatic Class	7/L1
Refrigerant Gas	R507A, R404A, R290
Internal Light	LED
Gross - Net Weight (Kg)	63 - 56
Packaging Dimensions (mm)	—
Q. ty	
Container 20" (ft)	80
Container 40" (ft)	176
Container 40" (ft) HC	176





MULTIDECK FREEZER



43



45



55



	STD	OPT
No.2 adjustable feet and No.2 rollers	●	
Lock system	●	
Digital thermometer (Glee 43)	●	
Electronic controller (Glee 45 - Glee 55)	●	
Customized graphic		●

TECHNICAL SPECIFICATIONS	GLEE 43	GLEE 45	GLEE 55
Temperature	-25°C / -18°C	-25°C / -18°C	-25°C / -18°C
Cabinet Dimensions WxDxH (mm)	670 x 641 x 1965	670 x 613 x 1965	670 x 713 x 1965
Gross - Net Volume (Lt)	410 - 313	410 - 258	494 - 338
Cooling System	Static	Ventilated	Ventilated
Defrosting System	Manual	Automatic	Automatic
Climatic Class	7 / L1	7 / L1	7 / L1
Refrigerant Gas	R507A, R404A, R290	R507A, R404A, R290	R507A, R404A, R290
Internal Light	LED	LED	LED
Gross - Net Weight (Kg)	134 - 126	132 - 122	142 - 132
Packaging Dimensions (mm)	690 x 715 x 2040	690 x 715 x 2040	690 x 795 x 2040
Loading Quantity			
Container 20" (ft)	24	24	21
Container 40" (ft)	51	51	45
Container 40" (ft) HC	51	51	45



GLEE 35

35



35 MAX



	STD	OPT
No.2 adjustable feet and No.2 rollers	•	
Lock system	•	
Electronic controller	•	
Customized graphic		•

TECHNICAL SPECIFICATIONS	GLEE 35	GLEE 35 MAX
Temperature	-25°C / -18°C	-25°C / -18°C
Cabinet Dimensions WxDxH (mm)	670 x 610 x 1600	670 x 710 x 1600
Gross - Net Volume (Lt)	314 - 183	378 - 225
Cooling System	Ventilated	Ventilated
Defrosting System	Automatic	Automatic
Climatic Class	7 / L1	7 / L1
Refrigerant Gas	R507A, R404A, R290	R507A, R404A, R290
Internal Light	LED	LED
Gross - Net Weight (Kg)	119 - 108	128 - 116
Packaging Dimensions (mm)	690 x 715 x 1680	690 x 795 x 1680
Loading Quantity		
Container 20" (ft)	24	21
Container 40" (ft)	51	45
Container 40" (ft) HC	51	45





ASIA CL

MULTIDECK FREEZER IARP PLUG-IN SOLUTIONS

65CL



115CL



	STD	OPT
4 casters and 2 adjustable feet	●	
Lock system	●	
Customized graphic		●

TECHNICAL SPECIFICATIONS	ASIA 65CL	ASIA 115CL
Temperature	-25°C / -18°C	-25°C / -18°C
Cabinet Dimensions WxDxH (mm)	670 x 807 x 2040	1340 x 807 x 2040
Gross - Net Volume (Lt)	464 - 378	1236 - 824
Cooling System	Ventilated	Ventilated
Defrosting System	Automatic	Automatic
Climatic Class	4 / L1	4 / L1
Refrigerant Gas	R507A, R404A, R290	R507A, R404A, R290
Internal Light	LED	LED
Gross - Net Weight (Kg)	165 - 155	285 - 229
Packaging Dimensions (mm)	710 x 860 x 2180	1510 x 970 x 2260
Loading Quantity		
Container 20" (ft)	12	7
Container 40" (ft)	28	16
Container 40" (ft) HC	28	16



2D



3D



	STD	OPT
4 wheels and 6 adjustable feet	•	
Lock system		•
Bumper		•
LED light front canopy		•

TECHNICAL SPECIFICATIONS	GLAD 2D	GLAD 3D
Temperature	-25°C / -18°C	-25°C / -18°C
Cabinet Dimensions WxDxH (mm)	1471 x 850 x 2080	2139 x 850 x 2080
Gross - Net Volume (Lt)	1293 - 1009	1936 - 1511
Cooling System	Ventilated	Ventilated
Defrosting System	Automatic	Automatic
Climatic Class	3 / L1	3 / L1
Refrigerant Gas	R507A, R404A, R290	R507A, R404A, R290
Internal Light	LED	LED
Gross - Net Weight (Kg)	387 - 323	545 - 476
Packaging Dimensions (mm)	1620 x 970 x 2260	2270 x 970 x 2260
Loading Quantity		
Container 20" (ft)	7	6
Container 40" (ft)	14	12
Container 40" (ft) HC	14	12



MULTIDECK CHILLER





GLEE 42

MULTIDECK CHILLER

PLUG-IN AND SWITCH ON YOUR BUSINESS!



	STD	OPT
No.2 adjustable feet and No.2 rollers	•	
Lock system	•	
Electronic controller	•	
Customized graphic		•

TECHNICAL SPECIFICATIONS GLEE 42

Temperature	0°C / +10°C
Cabinet Dimensions WxDxH (mm)	670 x 613 x 1965
Gross - Net Volume (Lt)	410 - 258
Cooling System	Ventilated
Defrosting System	Off-Cycle
Climatic Class	7 / M2
Refrigerant Gas	R134A, R290
Internal Light	LED
Gross - Net Weight (Kg)	132 - 122
Packaging Dimensions (mm)	690 x 715 x 2040
Loading Quantity	
Container 20" (ft)	24
Container 40" (ft)	51
Container 40" (ft) HC	51





	STD	OPT
Tempered glass door	•	
Low E glass door	•	
Lock system	•	
LED lights	•	
Analogue thermometer	•	
2 rollers and 2 adjustable feet	•	

TECHNICAL SPECIFICATIONS

SUN 42

Temperature	0°C / +10°C
Cabinet Dimensions WxDxH (mm)	593 x 604 x 1830
Gross - Net Volume (Lt)	412 - 382
Cooling System	Ventilated
Defrosting System	Off-Cycle
Climatic Class	4 / M2
Refrigerant Gas	R134A, R600A
Internal Light	LED
Gross - Net Weight (Kg)	100 - 94
Packaging Dimensions (mm)	660 x 660 x 1936
Loading Quantity	
Container 20" (ft)	27
Container 40" (ft)	54
Container 40" (ft) HC	54



MAGENTA - SCARLET



TECHNICAL SPECIFICATIONS	MAGENTA 408 2T	SCARLET 289 2T
Temperature	+5°C / +12°C (upper) +5°C / +22°C (lower)	+5°C / +12°C (upper) +5°C / +22°C (lower)
Cabinet Dimensions WxDxH (mm)	598 x 705 x 1610	598 x 705 x 1210
Gross - Net Volume (Lt)	386 154 bottles capacity	275 110 bottles capacity
Cooling System	Ventilated	Ventilated
Defrosting System	Off-Cycle	Off-Cycle
Climatic Class	-	-
Refrigerant Gas	R600A	R600A
Internal Light	LED	LED
Gross - Net Weight (Kg)	91 - 82	78 - 70
Packaging Dimensions (mm)	655 x 780 x 1700	655 x 780 x 1300
Loading Quantity		
Container 20" (ft)	23	23
Container 40" (ft)	48	48
Container 40" (ft) HC	48	96



MULTIDECK CHILLER

PLUG-IN AND SWITCH ON YOUR BUSINESS!

OFFFLIP



TECHNICAL SPECIFICATIONS	OFFFLIP 93	OFFFLIP 125	OFFFLIP 187
Temperature	0°C / +10°C	0°C / +10°C	0°C / +10°C
Cabinet Dimensions WxDxH (mm)	997 x 705 x 2000	1310 x 705 x 2000	1935 x 705 x 2000
Gross - Net Volume (Lt)	Net 390	Net 520	Net 780
Cooling System	Ventilated	Ventilated	Ventilated
Defrosting System	Off-Cycle	Off-Cycle	Off-Cycle
Climatic Class	3 / M2	3 / M2	3 / M2
Refrigerant Gas	R404A, R290	R404A, R290	R404A, R290
Internal Light	LED	LED	LED
Gross - Net Weight (Kg)	230 - 210	260 - 240	370 - 335
Packaging Dimensions (mm)	1140 x 850 x 2183	1450 x 850 x 2183	2075 x 850 x 2183
Loading Quantity			
Container 20" (ft)	12	10	6
Container 40" (ft)	28	22	14
Container 40" (ft) HC	28	22	14



OFFFLIP ECO

MULTIDECK CHILLER

PLUG-IN AND SWITCH ON YOUR BUSINESS!



TECHNICAL SPECIFICATIONS	OFFFLIP ECO 125	OFFFLIP ECO 187
Temperature	-1°C / +7°C	-1°C / +7°C
Cabinet Dimensions WxDxH (mm)	1310 x 705 x 2000	1935 x 705 x 2000
Gross - Net Volume (Lt)	Net 520	Net 780
Cooling System	Ventilated	Ventilated
Defrosting System	Off-Cycle	Off-Cycle
Climatic Class	3 / M1	3 / M1
Refrigerant Gas	R404A, R290	R404A, R290
Internal Light	LED	LED
Gross - Net Weight (Kg)	300 - 270	430 - 395
Packaging Dimensions (mm)	1450 x 850 x 2183	2075 x 850 x 2183
Loading Quantity		
Container 20" (ft)	10	6
Container 40" (ft)	22	14
Container 40" (ft) HC	22	14



MULTIDECK CHILLER

PLUG-IN AND SWITCH ON YOUR BUSINESS!

CURL



TECHNICAL SPECIFICATIONS	CURL 70	CURL 93	CURL 125
Temperature	0°C / +10°C	0°C / +10°C	0°C / +10°C
Cabinet Dimensions WxDxH (mm)	760 x 705 x 1460	997 x 705 x 1460	1310 x 705 x 1460
Gross - Net Volume (Lt)	Net 190	Net 254	Net 339
Cooling System	Ventilated	Ventilated	Ventilated
Defrosting System	Off-Cycle	Off-Cycle	Off-Cycle
Climatic Class	3 / M2	3 / M2	3 / M2
Refrigerant Gas	R404A, R290	R404A, R290	R404A, R290
Internal Light	LED	LED	LED
Gross - Net Weight (Kg)	160 - 140	210 - 190	240 - 220
Packaging Dimensions (mm)	1140 x 850 x 1653	1140 x 850 x 1653	1450 x 850 x 1653
Loading Quantity			
Container 20" (ft)	12	12	10
Container 40" (ft)	28	28	22
Container 40" (ft) HC	28	28	22



iarp

PLUG-IN POWER



COMBINATION FREEZER & CHILLER





DIANA

COMBINATION FREEZER & CHILLER IARP PLUG-IN SOLUTIONS

125



180



	STD	OPT
Basket or dividers		•
Analogic thermometer		•
LED lights	•	
Switchable thermostat upper setting to chiller mode (ANP)		•

TECHNICAL SPECIFICATIONS	DIANA 125 AN	DIANA 125 ANP	DIANA 180 AN	DIANA 180 ANP
Temperature	-25°C / -18°C (upper) -25°C / -18°C (lower)	-25°C / -18°C (upper) -1°C / +5°C (upper) -25°C / -18°C (lower)	-25°C / -18°C (upper) -25°C / -18°C (lower)	-25°C / -18°C (upper) -1°C / +5°C (upper) -25°C / -18°C (lower)
Cabinet Dimensions WxDxH (mm)	1242x913x2005	1242x913x2005	1822x913x2005	1822x913x2005
Gross - Net Volume (Lt)	436 - 316 (upper) 443 - 219 (lower)	436 - 316 (upper) 443 - 219 (lower)	664 - 473 (upper) 675 - 333 (lower)	664 - 473 (upper) 675 - 333 (lower)
Cooling System	Ventilated (upper) Static (lower)	Ventilated (upper) Static (lower)	Ventilated (upper) Static (lower)	Ventilated (upper) Static (lower)
Defrosting System	Automatic	Automatic	Automatic	Automatic
Climatic Class	4 / L1 (upper) 4 / L1 (lower)	4 / L1-3 / M1 (upper) 4 / L1 (lower)	4 / L1 (upper) 4 / L1 (lower)	4 / L1-3 / M1 (upper) 4 / L1 (lower)
Refrigerant Gas	R507A, R404A, R290	R507A, R404A, R290	R507A, R404A, R290	R507A, R404A, R290
Internal Light	LED	LED	LED	LED
Gross - Net Weight (Kg)	342 - 288	342 - 288	432 - 372	432 - 372
Packaging Dimensions (mm)	1340x1010x2180	1340x1010x2180	1910x1010x2180	1910x1010x2180
Q. ty				
Container 20" (ft)	8	8	6	6
Container 40" (ft)	17	17	12	12
Container 40" (ft) HC	17	17	12	12



AMAZE S

100



130



*Extractable leg is 680mm depth

	STD	OPT
Touchscreen electronic thermostat controller	•	
LED underneath		•
Dual temperature function	•	
Retractable support	•	
Solid side	•	

TECHNICAL SPECIFICATIONS	AMAZE S100	AMAZE S130
Temperature	-25°C / -18°C -1°C / +5°C	-25°C / -18°C -1°C / +5°C
Cabinet Dimensions WxDxH (mm)	1050 x 680 x 1056	1230 x 680 x 1056
Gross - Net Volume (Lt)	220 - 171	262 - 214
Cooling System	Ventilated	Ventilated
Defrosting System	Automatic	Automatic
Climatic Class	4 / L1 - 4 / M1	4 / L1 - 4 / M1
Refrigerant Gas	R507A, R404A, R290	R507A, R404A, R290
Internal Light	LED	LED
Gross - Net Weight (Kg)	230 - 188	250 - 202
Packaging Dimensions (mm)	1165 x 865 x 1190	1345 x 865 x 1190
Loading Quantity		
Container 20" (ft)	22	18
Container 40" (ft)	-	-
Container 40" (ft) HC	52	44



AMAZE

130



180



210



*Extractable leg is 830mm depth

	STD	OPT
Touchscreen electronic thermostat controller	•	
LED underneath		•
Dual temperature function	•	
Retractable support	•	
Glass side	•	
Solid side		•

TECHNICAL SPECIFICATIONS	AMAZE 130	AMAZE 180	AMAZE 210
Temperature	-25°C / -18°C -1°C / +5°C	-25°C / -18°C -1°C / +5°C	-25°C / -18°C -1°C / +5°C
Cabinet Dimensions WxDxH (mm)	1230 x 870 x 1056	1810 x 870 x 1056	2105 x 870 x 1056
Gross - Net Volume (Lt)	409 - 334	622 - 509	731 - 597
Cooling System	Ventilated	Ventilated	Ventilated
Defrosting System	Automatic	Automatic	Automatic
Climatic Class	4 / L1 - 4 / M1	4 / L1 - 4 / M1	4 / L1 - 4 / M1
Refrigerant Gas	R507A, R404A, R290	R507A, R404A, R290	R507A, R404A, R290
Internal Light	LED	LED	LED
Gross - Net Weight (Kg)	295 - 227	394 - 335	426 - 361
Packaging Dimensions (mm)	1345 x 1040 x 1190	1925 x 1040 x 1190	2220 x 1040 x 1190
Loading Quantity			
Container 20" (ft)	14	10	9
Container 40" (ft)	-	-	-
Container 40" (ft) HC	34	24	22



CHEST FREEZER



732



755



735




	STD	OPT
4 wheels	•	
Lock system	•	
Drainage hole	•	
Basket with divider		•
Analogic thermometer	•	

TECHNICAL SPECIFICATIONS	DELTA 732	DELTA 735	DELTA 755
Temperature	-25°C / -18°C	-25°C / -18°C	-25°C / -18°C
Cabinet Dimensions WxDxH (mm)	1009 x 645 x 816	1184 x 645 x 816	1625 x 645 x 816
Gross - Net Volume (Lt)	261 - 194	330 - 242	487 - 362
Cooling System	Static	Static	Static
Defrosting System	Manual	Manual	Manual
Climatic Class	7 / L1	7 / L1	7 / L1
Refrigerant Gas	R507A, R404A, R290	R507A, R404A, R290	R507A, R404A, R290
Internal Light	-	-	-
Gross - Net Weight (Kg)	58 - 57	64 - 63	83 - 81
Packaging Dimensions (mm)	1050 x 680 x 840	1230 x 680 x 840	1670 x 680 x 840
Loading Quantity			
Container 20" (ft)	32	26	20
Container 40" (ft)	68	54	40
Container 40" (ft) HC	102	81	60



DELTA 732 EUTECTIC

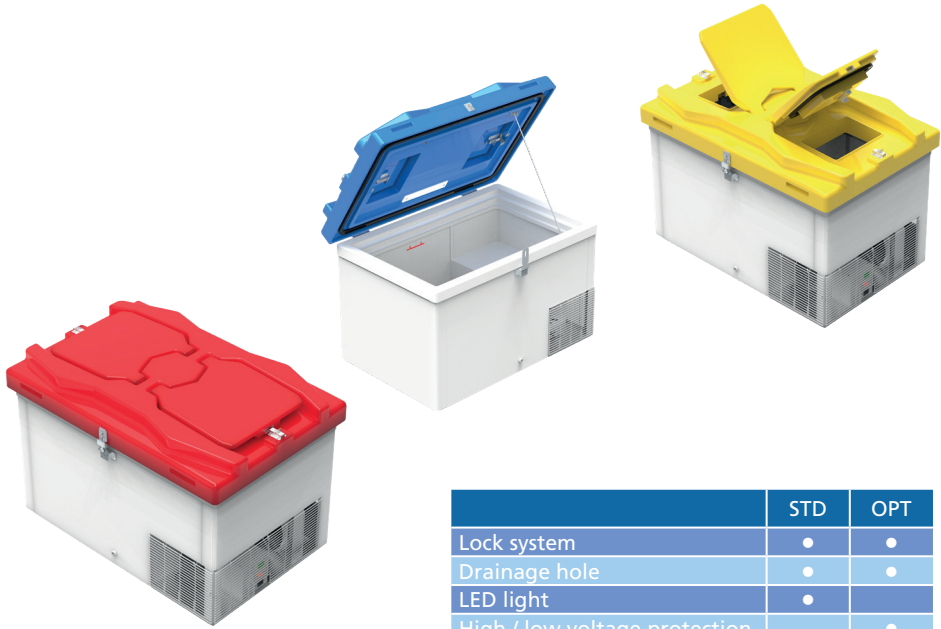

	STD	OPT
Lock system	•	•
Drainage hole	•	•
LED light	•	•
High / low voltage protection		•

TECHNICAL SPECIFICATIONS

DELTA 732 EUTECTIC

Temperature	-17/-32°C
Cabinet Dimensions WxDxH (mm)	1090 x 727 x 756
Gross - Net Volume (Lt)	261 - 126
Cooling System	Static
Defrosting System	Manual
Climatic Class	7 / L1
Refrigerant Gas	R290
Internal Light	LED
Gross - Net Weight (Kg)	98 - 96
Packaging Dimensions (mm)	1120 x 764 x 840
Loading Quantity	
Container 20" (ft)	30
Container 40" (ft)	60
Container 40" (ft) HC	90





DIANA R

CHEST FREEZER
IARP *PLUG-IN SOLUTIONS*

180



125



	STD	OPT
Customized graphic		•
Basket		•
Wheels	•	
Analogic thermometer	•	

TECHNICAL SPECIFICATIONS	DIANA 125R	DIANA 180R
Temperature	-25°C / -18°C	-25°C / -18°C
Cabinet Dimensions WxDxH (mm)	1280 x 848 x 1020	1860 x 848 x 1020
Gross - Net Volume (Lt)	564 - 315	895 - 515
Cooling System	Static	Static
Defrosting System	Automatic	Automatic
Climatic Class	4 / L1	4 / L1
Refrigerant Gas	R507A, R404A, R290	R507A, R404A, R290
Internal Light	LED	LED
Gross - Net Weight (Kg)	146 - 105	193 - 148
Packaging Dimensions (mm)	1370 x 940 x 1140	1950 x 940 x 1140
Loading Quantity		
Container 20" (ft)	18	11
Container 40" (ft)	40	24
Container 40" (ft) HC	40	24



	STD	OPT
Customized graphic		•
Basket and divider		•
Analogic thermometer	•	
Lockable wheels	•	
Digital thermometer		•

TECHNICAL SPECIFICATIONS	STELLA 150	STELLA 200	STELLA 250
Temperature	-25°C / -18°C	-25°C / -18°C	-25°C / -18°C
Cabinet Dimensions WxDxH (mm)	1547 x 967 x 753	2047 x 967 x 753	2547 x 967 x 753
Gross - Net Volume (Lt)	528 - 430	751 - 620	974 - 809
Cooling System	Static	Static	Static
Defrosting System	Manual	Manual	Manual
Climatic Class	4 / L1	4 / L1	4 / L1
Refrigerant Gas	R507A, R404A, R290	R507A, R404A, R290	R507A, R404A, R290
Internal Light	-	-	-
Gross - Net Weight (Kg)	106 - 90	137 - 115	175 - 145
Packaging Dimensions (mm)	1580 x 1000 x 810	2080 x 1000 x 810	2580 x 1000 x 810
Loading Quantity	-	-	-
Container 20" (ft)	12	10	8
Container 40" (ft)	24	22	16
Container 40" (ft) HC	42	33	24

130



180 - 210



	STD	OPT
Basket or dividers		•
Electronic controller	•	
Wheels	•	
Solid side		•

TECHNICAL SPECIFICATIONS	PASSION 130	PASSION 180	PASSION 210
Temperature	-25°C / -18°C	-25°C / -18°C	-25°C / -18°C
Cabinet Dimensions WxDxH (mm)	1278 x 936 x 1015	1828 x 936 x 1015	2128 x 936 x 1015
Gross - Net Volume (Lt)	661 - 364	1025 - 585	1224 - 705
Cooling System	Static	Static	Static
Defrosting System	Automatic	Automatic	Automatic
Climatic Class	4 / L1	4 / L1	4 / L1
Refrigerant Gas	R507A, R404A, R290	R507A, R404A, R290	R507A, R404A, R290
Internal Light	LED	LED	LED
Gross - Net Weight (Kg)	205 - 170	230 - 185	245 - 200
Packaging Dimensions (mm)	1415 x 1050 x 1160	1965 x 1050 x 1160	2265 x 1050 x 1160
Q. ty			
Container 20" (ft)	16	12	8
Container 40" (ft)	32	24	20
Container 40" (ft) HC	32	24	20





TECHNICAL SPECIFICATIONS	GELID
Temperature	-25°C / -18°C
Cabinet Dimensions WxDxH (mm)	1997 x 931 x 884
Gross - Net Volume (Lt)	853 - 638
Cooling System	Static
Defrosting System	Automatic
Climatic Class	4/L1
Refrigerant Gas	R507A, R404A, R290
Internal Light	LED
Gross - Net Weight (Kg)	197 - 140
Packaging Dimensions (mm)	2119 x 1050 x 1005
Loading Quantity	
Container 20" (ft)	10
Container 40" (ft)	22
Container 40" (ft) HC	22






ISLAND FREEZER & CHILLER



190



210 - 250

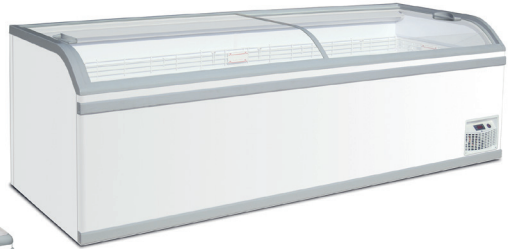

	STD	OPT
Electronic controller	•	
Coloured bumper		•
Basket support		•
Basket		•
Customized graphic		•

TECHNICAL SPECIFICATIONS	KREA 190	KREA 210	KREA 250
Temperature	-25°C / -18°C	-25°C / -18°C	-25°C / -18°C
Cabinet Dimensions WxDxH (mm)	1868 x 862 x 872	2105 x 899 x 872	2505 x 899 x 872
Gross - Net Volume (Lt)	805 - 525	950 - 668	1172 - 767
Cooling System	Static	Static	Static
Defrosting System	Automatic	Automatic	Automatic
Climatic Class	3 / L1	3 / L1	3 / L1
Refrigerant Gas	R507A, R404A, R290	R507A, R404A, R290	R507A, R404A, R290
Internal Light	LED	LED	LED
Gross - Net Weight (Kg)	161 - 115	184 - 149	202 - 162
Packaging Dimensions (mm)	2000 x 990 x 1010	2230 x 990 x 1010	2630 x 990 x 1010
Q. ty			
Container 20" (ft)	10	10	8
Container 40" (ft)	24	24	16
Container 40" (ft) HC	24	24	16



KREA PBL

220 - 260



	STD	OPT
Electronic controller	•	
Coloured bumper		•
Basket support		•
Basket		•
Customized graphic		•

TECHNICAL SPECIFICATIONS	KREA 220 PBL	KREA 260 PBL
Temperature	-25°C / -18°C	-25°C / -18°C
Cabinet Dimensions WxDxH (mm)	2105 x 899 x 872	2505 x 899 x 872
Gross - Net Volume (Lt)	950 - 668	1172 - 767
Cooling System	Static	Static
Defrosting System	Automatic	Automatic
Climatic Class	3 / L1	3 / L1
Refrigerant Gas	R507A, R404A, R290	R507A, R404A, R290
Internal Light	LED	LED
Gross - Net Weight (Kg)	184 - 149	202 - 162
Packaging Dimensions (mm)	2230 x 990 x 1010	2630 x 990 x 1010
Loading Quantity		
Container 20" (ft)	10	8
Container 40" (ft)	24	16
Container 40" (ft) HC	24	16



210



250



	STD	OPT
Basket or dividers		•
Electronic controller	•	
Adjustable feet	•	
High efficiency fan	•	

TECHNICAL SPECIFICATIONS	GLIDE 210	GLIDE 250
Temperature	-25°C / -18°C	-25°C / -18°C
Cabinet Dimensions WxDxH (mm)	2148 x 921 x 1008	2548 x 921 x 1008
Gross - Net Volume (Lt)	1224 - 705	1490 - 865
Cooling System	Static	Static
Defrosting System	Automatic	Automatic
Climatic Class	3 / L1	3 / L1
Refrigerant Gas	R507A, R404A, R290	R507A, R404A, R290
Internal Light	LED	LED
Gross - Net Weight (Kg)	245 - 181	270 - 200
Packaging Dimensions (mm)	2300 x 1030 x 1145	2700 x 1030 x 1145
Loading Quantity		
Container 20" (ft)	10	8
Container 40" (ft)	24	16
Container 40" (ft) HC	24	16



SVABA LIDS



	STD	OPT
Wired base	•	
Electronic controller	•	
Wheels		•
LED light	•	

TECHNICAL SPECIFICATIONS	SVABA 150 LIDS	SVABA 200 LIDS
Temperature	-25°C / -18°C -1°C / +5°C	-25°C / -18°C -1°C / +5°C
Cabinet Dimensions WxDxH (mm)	1545 x 1046 x 930	2045 x 1046 x 930
Gross - Net Volume (Lt)	266 - 266	362 - 362
Cooling System	Ventilated	Ventilated
Defrosting System	Automatic	Automatic
Climatic Class	3 / L1 3 / M1	3 / L1 3 / M1
Refrigerant Gas	R507A, R404A, R290	R507A, R404A, R290
Internal Light	LED	LED
Gross - Net Weight (Kg)	200 - 170	262 - 200
Packaging Dimensions (mm)	1642 x 1142 x 1130	2142 x 1142 x 1130
Loading Quantity		
Container 20" (ft)	14	10
Container 40" (ft)	28	22
Container 40" (ft) HC	28	22



200

150



	STD	OPT
Wired base	●	
Electronic controller	●	
Wheels		●

TECHNICAL SPECIFICATIONS	SVABA 150	SVABA 200	SVABA 150 2C	SVABA 200 2C
Temperature	-15°C / -10°C -1°C / +5°C	-15°C / -10°C -1°C / +5°C	-25°C / -18°C -1°C / +5°C	-25°C / -18°C -1°C / +5°C
Cabinet Dimensions WxDxH (mm)	1545 x 1046 x 933	2045 x 1046 x 933	1545 x 1046 x 933	2045 x 1046 x 933
Gross - Net Volume (Lt)	266 - 266	362 - 362	266 - 266	362 - 362
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated
Defrosting System	Automatic	Automatic	Automatic	Automatic
Climatic Class	3 / S	3 / S	3 / L1 3 / M1	3 / L1 3 / M1
Refrigerant Gas	R507A, R404A, R290	R507A, R404A, R290	R507A, R404A, R290	R507A, R404A, R290
Internal Light	-	-	-	-
Gross - Net Weight (Kg)	180 - 150	242 - 180	240 - 180	268 - 206
Packaging Dimensions (mm)	1642 x 1142 x 1130	2142 x 1142 x 1130	1642 x 1142 x 1130	2142 x 1142 x 1130
Loading Quantity				
Container 20" (ft)	14	10	14	10
Container 40" (ft)	28	22	28	22
Container 40" (ft) HC	28	22	28	22



SCOOPING FREEZER




DELIGHT 7 LITE



BINS LAYOUT


DISPLAY AREA

(NR. 7 PCS - 5 LITERS STAINLESS STEEL TRAY)

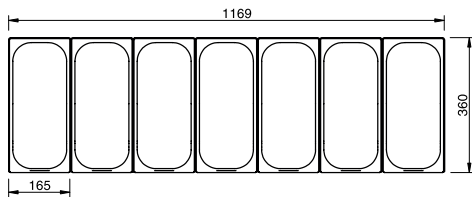

STORAGE AREA

(NR. 12 PCS - 5 LITERS S.STEEL TRAYS)



DELIGHT 7 LITE



	STD	OPT
4 casters	•	
Electronic thermostat controller	•	
Storage area	•	
Stainless steel bins		•

TECHNICAL SPECIFICATIONS	DELIGHT 7 LITE
Temperature	-25°C / -15°C
Cabinet Dimensions WxDxH (mm)	1328 x 726 x 1228
Gross - Net Volume (Lt)	371
Cooling System	Static
Defrosting System	Automatic
Climatic Class	4/L1
Refrigerant Gas	R507A,R404A, R290
Internal Light	LED
Gross - Net Weight (Kg)	148 - 110
Packaging Dimensions (mm)	1440 x 870 x 1330
Q. ty	
Container 20" (ft)	8
Container 40" (ft)	16
Container 40" (ft) HC	32

Ice Cream

This Way →




ITALIAN RANGE




DELIGHT 6-9-10-13 (Lite-Prime)

DISPLAY AREA


DELIGHT 6 (NR. 6 PCS - 5 LITERS)




DELIGHT 9 (NR. 9 PCS - 5 LITERS)



DELIGHT 10 (NR. 10 PCS - 5 LITERS)




DELIGHT 13 (NR. 13 PCS - 5 LITERS)

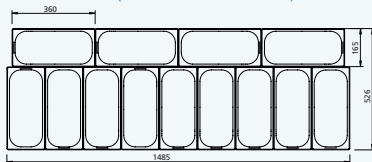


STORAGE AREA


DELIGHT 6 - 10 (NR. 8 PCS - 5 LITERS)



DELIGHT 9 (NR. 18 PCS - 5 LITERS)



DELIGHT 13 (NR. 14 PCS - 5 LITERS)



6



9



10



13


TECHNICAL SPECIFICATIONS	DELIGHT 6	DELIGHT 9	DELIGHT 10	DELIGHT 13
Temperature	-14°C / -10°C	-14°C / -10°C	-14°C / -10°C	-14°C / -10°C
Cabinet Dimensions (mm) WxDxH	1178 x 726 x 1228	1663 x 726 x 1228	1330 x 833 x 1228	1663 x 833 x 1228
Gross - Net Volume (Lt)	218 + 100 100 + 75	296 + 179 146 + 134	295 + 135 140 + 62	374 + 205 178 + 105
Cooling System	Static	Static	Static	Static
Defrosting System	Automatic	Automatic	Automatic	Automatic
Climatic Class	7 / G1	7 / G1	7 / G1	7 / G1
Refrigerant Gas	R290	R290	R290	R290
Internal Light	LED	LED	LED	LED
Gross - Net Weight (Kg)	99 - 77	161 - 138	171 - 142	196 - 158
Packaging Dimensions (mm)	1350 x 935 x 1300	1750 x 890 x 1365	1442 x 1027 x 1340	1775 x 1027 x 1340




DELIGHT 16-18-20 (Lite-Prime)

DISPLAY AREA


DELIGHT 16 (NR. 16 PCS - 5 LITERS)



DELIGHT 18 (NR. 18 PCS - 5 LITERS)

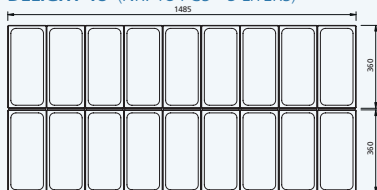

DELIGHT 20 (NR. 20 PCS - 5 LITERS)

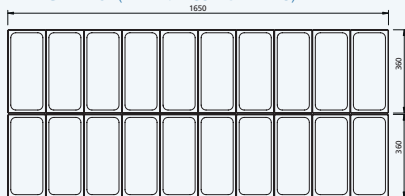


STORAGE AREA


DELIGHT 16 (NR. 8 PCS - 5 LITERS)



DELIGHT 18 (NR. 9 PCS - 5 LITERS)



DELIGHT 20 (NR. 10 PCS - 5 LITERS)



DELIGHT 6-9-10-13-16-18-20	STD	OPT
4 casters	•	
Electronic thermostat controller	•	
Storage area	•	
Stainless steel bins		•

TECHNICAL SPECIFICATIONS	DELIGHT 16	DELIGHT 18	DELIGHT 20
Temperature	-14°C / -10°C	-14°C / -10°C	-14°C / -10°C
Cabinet Dimensions WxDxH (mm)	1519 x 1050 x 1324	1684 x 1050 x 1324	1850 x 1050 x 1324
Gross - Net Volume (Lt)	459 - 282	516 - 317	574 - 352
Cooling System	Static	Static	Static
Defrosting System	Automatic	Automatic	Automatic
Climatic Class	7 / G1	7 / G1	7 / G1
Refrigerant Gas	R290	R290	R290
Internal Light	LED	LED	LED
Gross - Net Weight (Kg)	290 - 225	319 - 250	380 - 275
Packaging Dimensions (mm)	1635 x 1190 x 1440	1800 x 1190 x 1440	1965 x 1190 x 1440





eptarefrigeration

PLUG-IN POWER



Download our APP



www.iarp-plugin.com

Follow us on:      by Epta